

**EN BHU product information sheet****BHU**

Basic Hyper cooktop with integrated cooktop extractor – recirculation

**General product information:**

Product:	Compact cooktop extractor system – a combined cooktop and extractor system
Product highlights:	Effective cooktop extractor including stainless steel grease filter, cooktop with four radiant cooking zones, simple central touch controls, Hyper cooking zone with up to 50% higher performance on the power setting
Model:	Recirculation system with integrated odour filter
Minimum installation dimensions:	Kitchen unit with a min. width of 80 cm
Safety and warning information:	See operating and installation instructions



**PISBHUEN-1000 1**

# BHU

## Basic Hyper cooktop with integrated cooktop extractor – recirculation

### Technical data

Multiphase supply voltage	380-415 V 2N/3N
Supply voltage 1-phase	220-240 V
Frequency	50-60 Hz
Maximum power consumption	7000 W
3-phase fuse protection/power supply	3 × 16 A
2-phase fuse protection/power supply	2 × 16 A
1-phase fuse protection/power supply	1 × 32 A
Dimensions (width × depth × height)	760 × 515 × 196 mm
Weight (incl. accessories/packaging)	25 kg
Surface material	Glass ceramic
Cooktop extractor power levels	1, 2, P
Cooktop power levels	1-9, P
Size of exhaust opening	650 × 90 mm
Size of front cooking zones	Ø 210 mm
Size of rear cooking zones	Ø 140 mm
Front cooking zone output	2300 W
Rear cooking zone output	1200 W
Output of front cooking zones on power setting	3000 W
Filter material	Activated charcoal with ion exchanger
Maximum filter service life	150 hrs (1 year)
Duct connection	BORA Ecotube

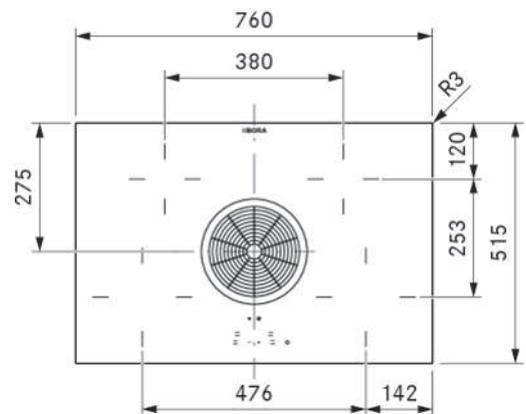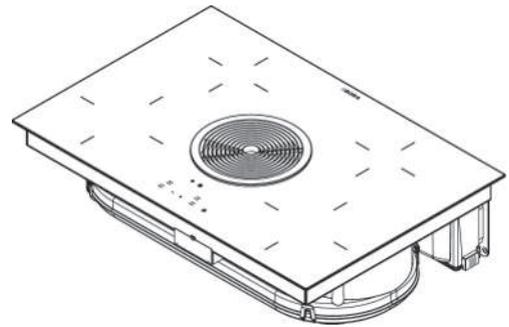

### Product description

- Radiant cooktop
- Compact size
- Low volume
- Simple cleaning
- Stainless steel grease filter
- Activated charcoal filter for effective odour elimination

### Functions

- Power setting
- Automatic after-run
- Automatic heat-up function
- Heat retention function
- Cooking zone timer
- Short-time timer
- Filter service display

### Safety features

Child lock, residual heat indicator, safety shut-down, overheating protection

### Scope of delivery

Hyper cooktop with integrated cooktop extractor – recirculation BHU, air inlet nozzle GP4ED, stainless steel grease filter, activated charcoal filter BAKFS, telescopic pull-out, operating and installation instructions, installation accessories

### Accessories

Activated charcoal filter set BAKFS, stainless steel grease filter BFF, air inlet nozzle for Basic/GP4 GP4ED, sealing tape UDB25, cooktop frame KFR760AB, side frame USL515/USL515AB, exhaust air duct extension BLAVH1, recirculation conversion set BUSAE

### Product and planning information

- The mains supply cable is to be provided on site
- Front power socket
- Flush installation or surface mounting possible
- Sufficient ventilation below the cooktop must be ensured
- Suitable for use with all BORA sockets

