


EN CKFI product information sheet

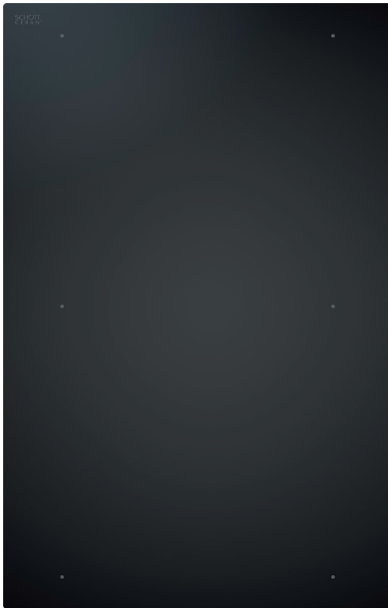

CKFI

Classic surface induction cooktop

General product information:

Product:	Surface induction cooktop for the modular cooktop extractor system BORA Classic 2.0.
Product highlights:	Intuitive touch controls on the cooktop extractor operating panel, fully flush-mounted cooktop and extractor, oversized surface induction cooking zone
Safety and warning information:	See operating and installation instructions

PISCKFIEN-1000 1

CKFI

Classic surface induction cooktop

Technical data

Supply voltage	220-240 V
Frequency	50-60 Hz
Maximum power consumption	3680 W
Maximum power rating	3680 W
Fuse protection	1 × 16 A
Dimensions (width × depth × height)	327 × 515 × 58 mm
Weight (incl. accessories / packaging)	7.9 kg
Surface material	Glass ceramic
Cooktop power levels	1-9, P
Size of front cooking zone	230 × 230 mm
Size of rear cooking zone	230 × 230 mm
Front cooking zone output	2100 W
Rear cooking zone output	2100 W
Front cooking zone output on power setting	3680 W
Rear cooking zone output on power setting	3680 W
Cooktop power supply cable	1.5 m

Product description

- Oversized surface induction cooking zones
- Compact size
- Minimalist design
- Demo mode

Functions

- Power setting
- Pan size recognition
- Cooking zone timer
- Automatic heat-up function
- Heat retention function
- Bridging function
- Pause function
- Cleaning lock

Safety features

Child lock, residual heat indicator, overheating protection, safety shut-down

Scope of delivery

Surface induction cooktop CKFI, mains supply cable, installation accessories

Accessories

Grill pan for surface induction KWGPFI

Product and planning information

- Can only be operated in conjunction with a cooktop extractor
- Sufficient ventilation below the cooktop must be ensured
- Induction cookware required
- When installation is complete, the appliance is to be sealed in using heat-resistant silicone sealant

