



EN PKC3 / PKC3AB product information sheet

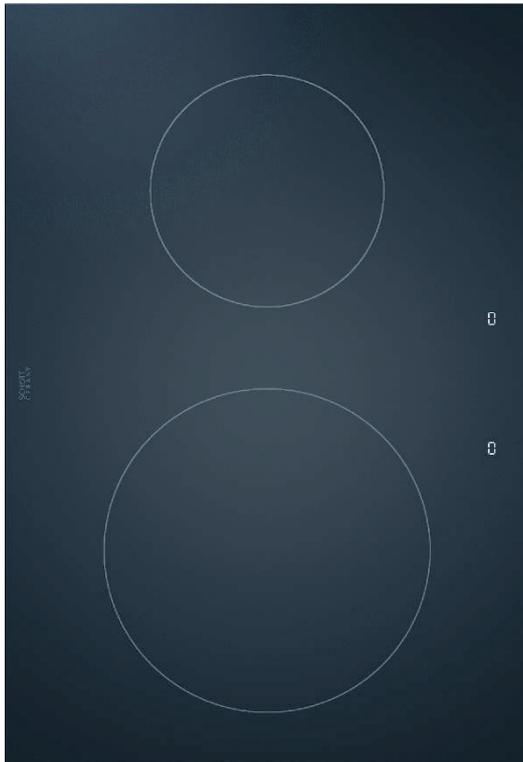

PKC3

Pro HiLight cooktop, 3-ring/2-ring

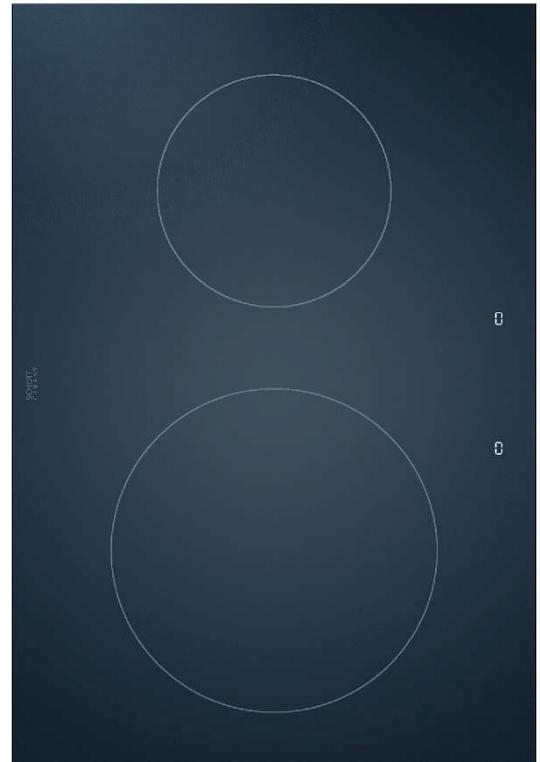

PKC3AB

Pro HiLight cooktop 3-ring/2-ring, All Black

General product information:



Product:	Radiant cooktop for the modular cooktop extractor system BORA Professional 3.0
Product highlights:	Very large cooktop with a depth of 540 mm, intuitive control knob - turn the knob ring or touch the touch surface, ring switching (2-ring/3-ring switching), rotation by 180° possible during installation
Safety and warning information:	See operating and installation instructions

PKC3 / PKC3AB

Pro HiLight cooktop 3-ring/2-ring (...All Black)

Technical data

Supply voltage	380-415 V 2N
Frequency	50-60 Hz
Maximum power consumption	4400 W
Maximum power rating	4400 W
Fuse protection	2 × 16 A
Mains supply cable length	1.5 m
Dimensions (width × depth × height)	370 × 540 × 73 mm
Weight (incl. accessories/packaging)	8.7 kg
Surface material	Glass ceramic
Cooktop power levels	1-9, 2-ring/3-ring additional switching
Heating rings on front cooking zone	3
Heating rings on rear cooking zone	2
Size of front cooking zone	Ø 120/180/235 mm
Size of rear cooking zone	Ø 120/200 mm
Front cooking zone output	800/1600/2500 W
Rear cooking zone output	800/1900 W

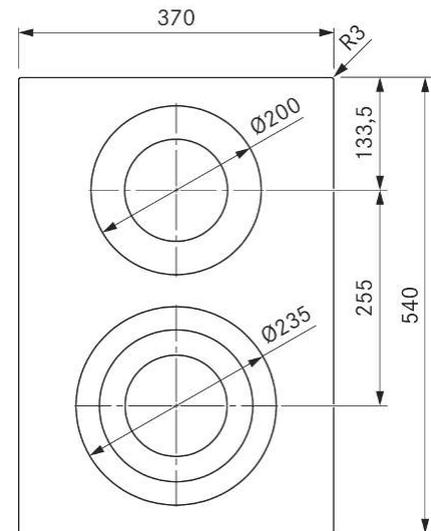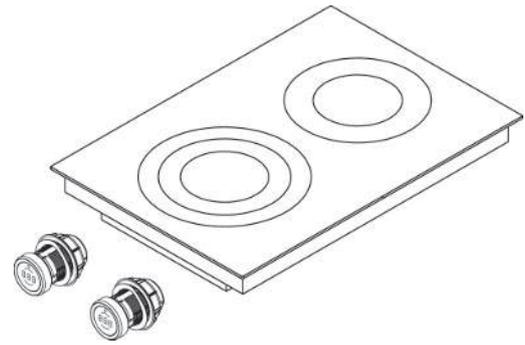

Product description

- Intuitive control knob
- 2-ring additional switching
- 3-ring additional switching
- Demo mode

Functions

- Cooking zone timer
- Automatic heat-up function
- Variable heat retention function
- Pause function
- Super simple mode

Safety features

Child lock, residual heat indicator, overheating protection, safety shut-down

Scope of delivery

HiLight cooktop 3-ring/2-ring PKC3/PKC3AB, 2 × control knobs, 2 × control knob connection cables, connection cable to the extractor, operating and installation instructions, installation accessories

Product and planning information

- Rotation by 180° possible during installation
- Sufficient ventilation below the cooktop must be ensured

