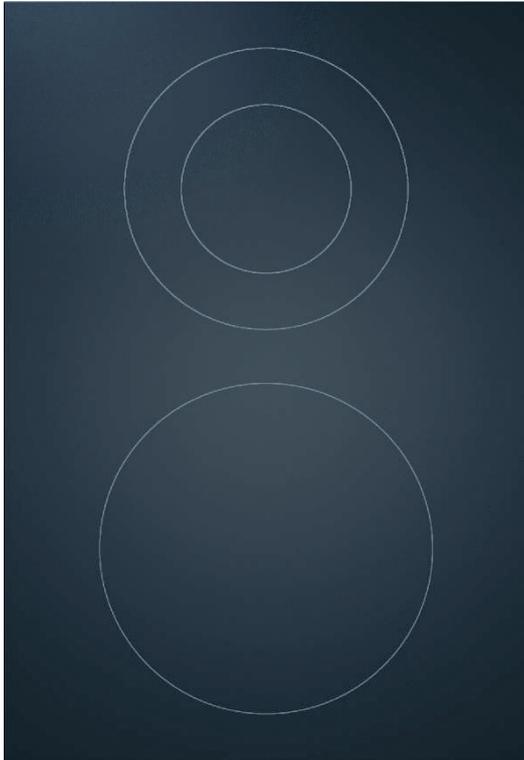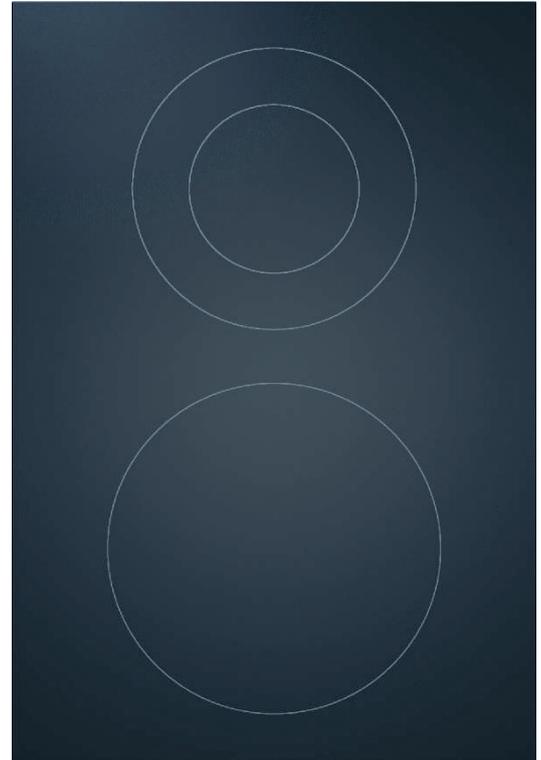## ⠿⠿ BORA

PKCH3/ PKCH3AB product information sheet

PKCH3

Pro Hyper cooktop, 1-ring/2-ring

PKCH3AB

Pro Hyper cooktop, 1-ring/2-ring, All Black

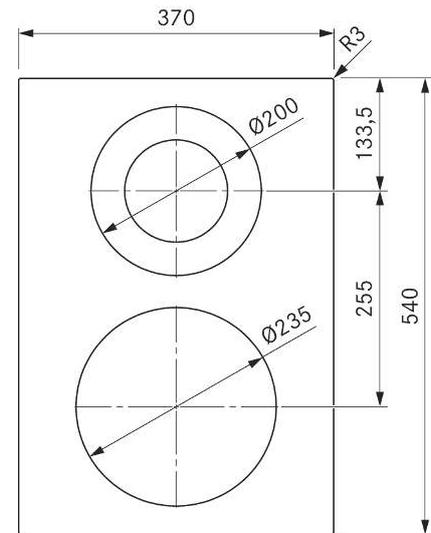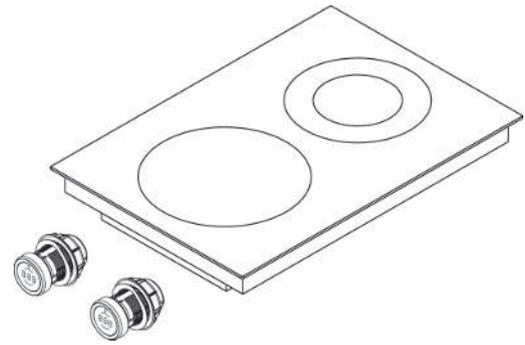**General product information:**

Product:	Radiant cooktop for the modular cooktop extractor system BORA Professional 3.0
Product highlights:	Very large cooktop with a depth of 540 mm, intuitive control knob – turn the knob ring or touch the touch surface, 2-ring switching, rotation by 180° possible during installation
Safety and warning information:	See operating and installation instructions

PISPKCH3EN-10001

PKCH3 / PKCH3AB

Pro Hyper cooktop 1-ring/2-ring (...All Black)

Technical data

Supply voltage	380–415 V 2N
Frequency	50–60 Hz
Maximum power consumption	5100 W
Maximum power rating	5100 W
Fuse protection	2 × 16 A
Mains supply cable length	1.5 m
Dimensions (width × depth × height)	370 × 540 × 73 mm
Weight (incl. accessories/packaging)	8.7 kg
Surface material	Glass ceramic
Cooktop power levels	1–9, Hyper setting, 2-ring additional switching
Heating rings on front cooking zone	1
Heating rings on rear cooking zone	2
Size of front cooking zone	Ø 235 mm
Size of rear cooking zone	Ø 120/200 mm
Front cooking zone output	2100 W
Rear cooking zone output	800/1900 W
Front cooking zone output on power setting	3,200 W (Hyper setting)

Product description
- Intuitive control knob
- Particularly quick initial heating
- 2-ring additional switching
- Demo mode

Functions
- Power setting
- Cooking zone timer
- Automatic heat-up function
- Variable heat retention function
- Pause function
- Super simple mode

Safety features
Child lock, residual heat indicator, overheating protection, safety shut-down

Scope of delivery
Hyper cooktop 1-ring/2-ring PKCH3/PKCH3AB, 2 × control knobs, 2 × control knob connection cables, connection cable to the extractor, operating and installation instructions, installation accessories

Product and planning information
- Rotation by 180° possible during installation
- Sufficient ventilation below the cooktop must be ensured