

EN PURMA product information sheet



PURMA

M Pure surface induction/induction cooktop with integrated cooktop extractor – exhaust air

General product information:

Product:	Compact cooktop extractor system – a combined cooktop and extractor system
Product highlights:	Effective cooktop extractor including stainless steel grease filter, cooktop with 2 surface induction cooking zones and 2 induction cooking zones, intuitive touch controls, coloured air inlet nozzles as accessories
Model:	Exhaust air system with BORA Ecotube duct connection
Minimum installation dimensions:	Kitchen unit with a min. width of 80 cm
Safety and warning information:	See operating and installation instructions
Energy efficiency class:	





PISPURMAEN-10001

PURMA

M Pure surface induction/induction cooktop with integrated cooktop extractor – exhaust air

Technical data

Multiphase supply voltage	380-415 V 2N/3N
Supply voltage 1-phase	220-240 V
Frequency	50-60 Hz
Maximum power consumption	7600 W (4400 W/3600 W)
3-phase fuse protection/power supply	3 × 16 A
2-phase fuse protection/power supply	2 × 16 A
1-phase fuse protection/power supply	1 × 32 A (1 × 20 A/1 × 16 A)
Dimensions (width × depth × height)	760 × 515 × 199 mm
Weight (incl. accessories/packaging)	21.8 kg
Surface material	Glass ceramic
Cooktop extractor / cooktop power levels	1-9, P
Size of front left cooking zone	Ø 210 mm
Size of rear left cooking zone	Ø 175 mm
Size of right cooking zones	230 × 230 mm
Front left cooking zone output	2300 W
Rear left cooking zone output	1400 W
Right cooking zone output	2100 W
Front left cooking zone output on power setting	3000 W
Rear left cooking zone output on power setting	2100 W
Output of right cooking zones on power setting	3000 W
Duct connection	BORA Ecotube

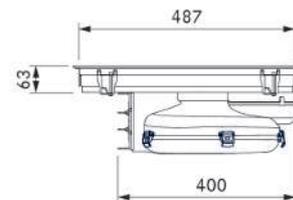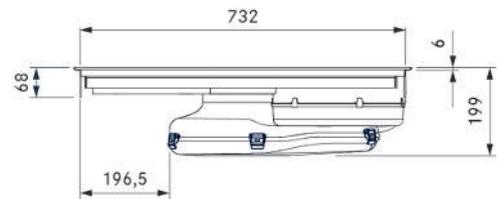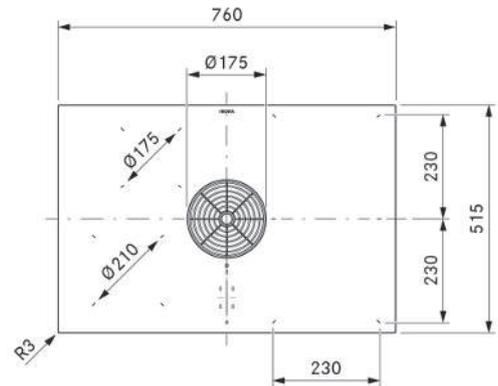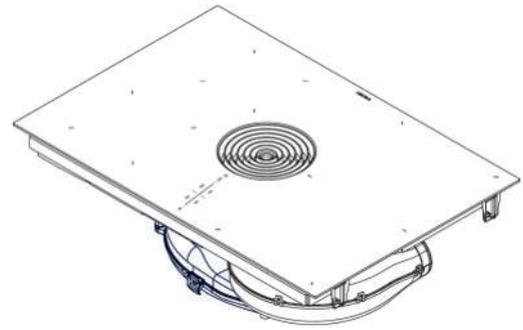

Product description

- Intuitive, white sControl operating panel
- Oversized surface induction cooking zones (right)
- Compact size
- Stainless steel grease filter and integrated drip tray
- Oversized drip tray (3-litre capacity)

Functions

- Power setting
- Automatic extractor function
- Automatic after-run
- Pan size recognition
- Automatic heat-up function
- Heat retention function
- Bridging function (right)
- Cooking zone timer
- Pause function
- Short-time timer
- Super simple mode

Safety features

Child lock, control lock, cleaning lock, residual heat indicator, safety shut-down, overheating protection

Scope of delivery

Surface induction/induction cooktop with integrated cooktop extractor – exhaust air PURMA, black air inlet nozzle, stainless steel grease filter, operating and installation instructions, installation accessories

Accessories

Stainless steel grease filter PUEF, coloured air inlet nozzles (black PUED, greige PUEDG, red PUEDR, jade green PUEDJ), orange PUEDO, blue PUEDB, light grey PUEDL, sunshine yellow PUEDS), sealing tape UDB25, cooktop frame KFR760AB, grill pan for surface induction KWGPFI

Product and planning information

- The mains supply cable is to be provided on site
- Front power socket
- Flush installation or surface mounting possible
- Sufficient ventilation below the cooktop must be ensured
- The drawers/ shelves in the base unit must be removable (for maintenance/cleaning)
- Suitable for use with all BORA sockets
- Not compatible with BORA universal fans