


EN PURSA product information sheet

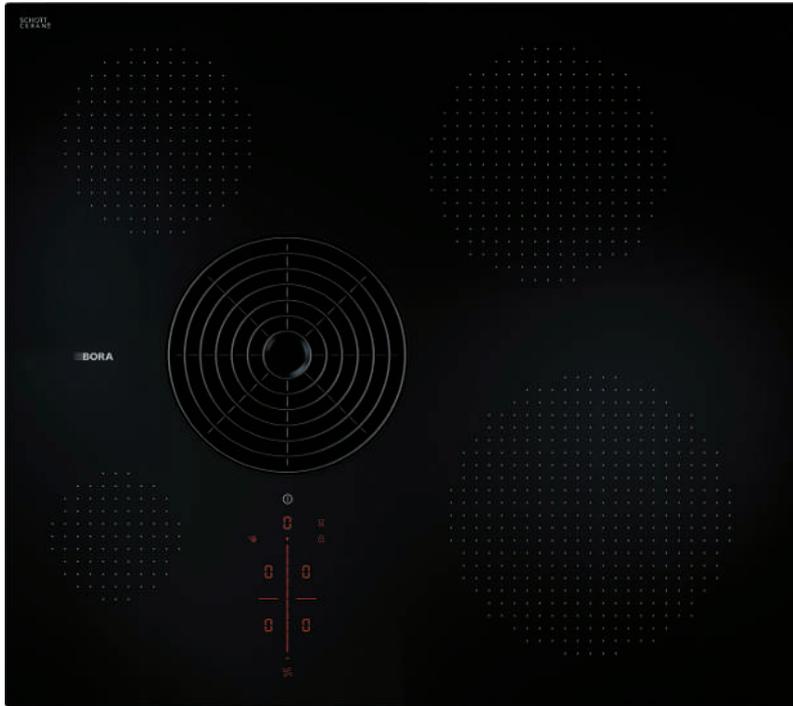

PURSA

S Pure induction cooktop with integrated cooktop extractor – exhaust air

General product information:

Product:	Compact cooktop extractor system – a combined cooktop and extractor system
Product highlights:	Effective cooktop extractor including stainless steel grease filter, most compact cooktop design with 4 induction cooking zones in a range of sizes, intuitive touch controls, coloured air inlet nozzles as accessories
Model:	Exhaust air system with BORA Ecotube duct connection
Minimum installation dimensions:	Kitchen unit with a min. width of 60 cm
Safety and warning information:	See operating and installation instructions
Energy efficiency class:	





PISPURSAEN-1000 1

PURSA

S Pure induction cooktop with integrated cooktop extractor – exhaust air

Technical data

Multiphase supply voltage	380-415 V 2N/3N
Supply voltage 1-phase	220-240 V
Frequency	50-60 Hz
Maximum power consumption	7250 W (4400 W/3600 W)
3-phase fuse protection/power supply	3 × 16 A
2-phase fuse protection/power supply	2 × 16 A
1-phase fuse protection/power supply	1 × 32 A (1 × 20 A / 1 × 16 A)
Dimensions (width × depth × height)	580 × 515 × 199 mm
Weight (incl. accessories/packaging)	18.3 kg
Surface material	Glass ceramic
Cooktop extractor / cooktop power levels	1-9, P
Size of front left cooking zone	Ø 95 mm
Size of rear left cooking zone	Ø 140 mm
Size of front right cooking zone	Ø 210 mm
Size of rear right cooking zone	Ø 175 mm
Front left cooking zone output	400 W
Rear left cooking zone output	900 W
Front right cooking zone output	2300 W
Rear right cooking zone output	1400 W
Front left cooking zone output on power setting	600 W
Rear left cooking zone output on power setting	1350 W
Front right cooking zone output on power setting	3000 W
Rear right cooking zone output on power setting	2100 W
Duct connection	BORA Ecotube

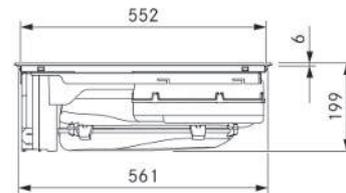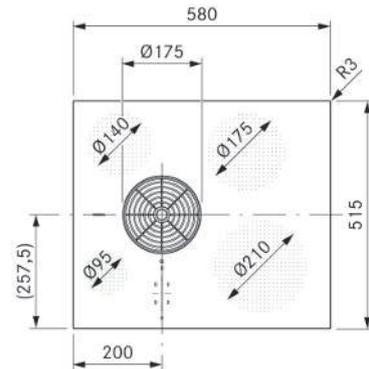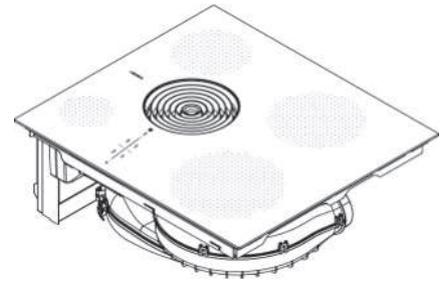

Product description

- Intuitive, red sControl operating panel
- Ultra-compact design
- Stainless steel grease filter
- Integrated drip tray
- Oversized drip tray (3-litre capacity)

Functions

Coffee function, power setting, automatic extractor function, automatic after-run, pan size recognition, automatic heat up function, heat retention function, cooking zone timer, pause function, short-time timer, super simple mode

Safety features

Child lock, control lock, cleaning lock, residual heat indicator, safety shut-down, overheating protection

Scope of delivery

Induction cooktop with integrated cooktop extractor – exhaust air PURSA, black air inlet nozzle, stainless steel grease filter, operating and installation instructions, installation accessories

Accessories

Stainless steel grease filter PUEF, coloured air inlet nozzles (black PUED, greige PUEDG, red PUEDR, jade green PUEDJ, orange PUEDO, blue PUEDB, light grey PUEDL, sunshine yellow PUEDS), sealing tape UDB25, cooktop frame KFR580AB, side frame USL515/USL515AB

Product and planning information

- The mains supply cable is to be provided on site
- Front power socket
- Flush installation or surface mounting possible
- Sufficient ventilation below the cooktop must be ensured
- The drawers/ shelves in the base unit must be removable (for maintenance/cleaning)
- Suitable for use with all BORA sockets
- Not compatible with BORA universal fans